

The TRIMIG 200-4S is a « synergic » three phase welding unit, ideal for maintenance and locksmith work. It can weld steel, stainless, aluminium, and it is particularly suitable for intensive professional work up to $\varnothing 1$.

PRODUCT

In « Synergic » mode, setting is fast and simple. The Micro processor controller will automatically set the optimum wire speed. This avoids complex set-up and ensures optimum welding parameters.

3 FUNCTIONS AVAILABLE

- **Normal**
- **Spot:** Spot welding with adjustable spot diameter
- **Delay:** « Chain spot » function (Spot welding with time adjustment between 2 spots).

SYNERGIC MODE FOR EASY AND QUICK SETTINGS

- **With this function, the wire speed setting is Automatic.**

Simply select:


- the wire type
- the wire \varnothing
- the power

TRIMIG 200-4S sets the optimum wire speed for you.

- **Save the last settings.**



Included :
- 1 torch 250 A (3m)
- Earth clamp (2m)

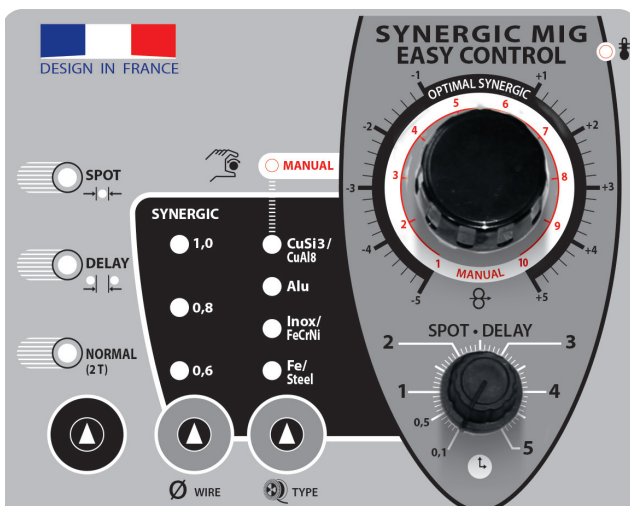

ACCESSORIES




















Torch MB25 kit (250A) (Not included)



Ref. 041233

Composition:

- Contact tips:
 - $\varnothing 0,8$ M6 steel/stainless (x 5)
 - $\varnothing 1,0$ M6 steel/stainless (x 5)
 - $\varnothing 1,0$ M6 Alu (x 5)
- Contact tips supports 250A (x 3)
- Springs for nozzle (x 5)
- Nozzles 250A (x 3)

															
50/60hz	10A	min▷max	GAS	NO GAS	100	200	300	Electronic Control			EN60974-1 (40°C)	U_0			
400V 3~	10A	30-200A	0.6	-	-	✓	✓		0.8/1.0	1.0	I _A (60%)	X% (I ₂ max)	cm/kg	Protected & compatible POWER GENERATOR (+/- 15%)	
			1.0	-	-						140A	200A 30%	17V 34.5V	47x77x79 / 63	7.5 kVA